

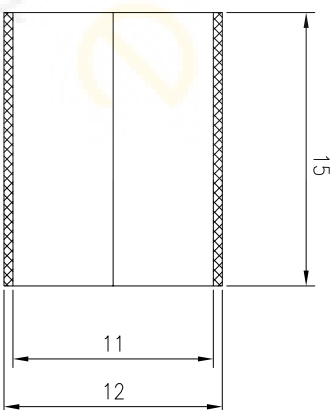




Product NO.		EB-006-0031			
REV	DESCRIPTION	DMN	DATE	APPROVEN	
RL. 0	First issue	Gavin	2024/04/25	JIM. KING	

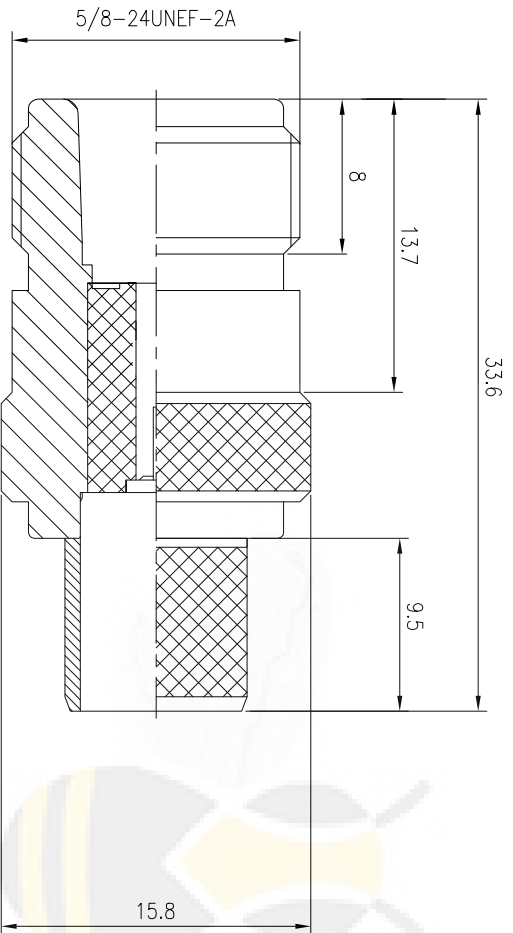

Specifications
 Impedance: 50 Ohms
 Frequency Range: 0-6G
 VSWR: 1.5MAX
 Working Voltage: 1000 VRMS (max at sea level)
 Dielectric Withstanding Voltage: 1500 vrms (max at sea level)
 Insulation Resistance: 5000 MOhms min
 Durability Mating: 500 Cycles min
 Temperature Range: -55°C TO +165°C

NO	DESCRIPTION	MATERIAL	FINISH	QTY
4	FERRULE	BRASS	NICKEL	1
3	PIN	BRASS	GOLD	1
2	INSULATION	PTFE	NONE	1
1	BODY	BRASS	NICKEL	1

-TOLERANCES-
 UNLESS OTHERWISE
 SPECIFIED



Buy From Original Factory
www.elecbec.com



PART DESCRIPTION:
 N JACK FOR RG8 LMR400 CABLE

UNLESS OTHERWISE SPECIFIED
 TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 8mm ± 0.20mm
 8 - 30mm ± 0.25mm
 30 - 120mm ± 0.30mm

Appd: JIM. KING	P/N:	EB-006-0031			
Check:	Date	Scale	Unit	Type	Page
Draw: Gavin	2024.04.25	Free	MM	Z	1/1